



WaterLink **SpinTouch**

 **LaMotte**[®]
PACIFIC

Mobile & In-Store Lab Portable Precision for the Pros



WaterLink® Spin Touch®

The innovative WaterLink® Spin Touch® photometer does all your pool and spa water testing for you. Each sealed reagent disk contains the precise amount of reagent needed to run a complete series of tests. Just fill one unique Spin reagent disk with less than 3 mL of water and all your vital tests are done automatically. In just 30 or 60 seconds all the test results are transferred into the WaterLink® Solutions™ PRO or DataMate® Web program (sold separately—see pages 7-10) and analysed to display results and recommend precise treatment instructions.

This is the most advanced system for precise use of wet chemistry methods ever produced! Now pool and spa analysts can achieve precision without time consuming test and clean-up procedures. This ground-breaking analysis system is so simple anyone can use it! No vials to fill, no prep time, no guessing!

- Reliable Results
- Super Fast & Simple
- Auto-Record Keeping
- 3-Use Disk Cuts Costs
- Rugged and Portable
- In-Store Testing

*Designed for Service Techs,
Pool Operators, and
Retail Professionals*





Mobile & In-Store Lab Ready to go anywhere!

Reliable Results

- Virtually Eliminates User-Error
- Pre-Measured Reagents
- Exact Reaction Time Analysis
- Meter Calibration Check System
- 6-Wavelength Photometer

Super Fast & Simple

- 30 Seconds for 3-Test Disk, 60 Seconds for 10-Test Disk
- Fill Disk > Tap "Start Test" > Read Results

Auto-Record Keeping

- Stores Test Dates, Times, Results
- Upload to Cloud, Download to Computer

Stand-Alone or Cloud Ready!

- No Computer, Smartphone, or Tablet Needed
- Touchscreen Operation [multilingual]
- Communicate Through Bluetooth® or USB

3-Use Disk Cuts Costs

- 3-Use Disk—Results in 30 Seconds!
- Meter Knows Which Test Section is New Test
- See various offerings on page 6

Rugged and Portable

- Innovative Water-Resistant Housing
- Internal, Rechargeable Batteries
- Optional Heavy-Duty, Waterproof Carrying Case

Advanced Cloud Software

- Android and iPhone Apps Enable Live Connections to Mobile Cloud Software
- WaterLink® Solutions™ PRO and DataMate® Web Software Offers Treatment Recommendations, Test Result Collection, and Much More!

In-Store Testing

- Fully Compatible with WaterLink® Solutions™ PRO and DataMate® Web
- Immune to Power or Computer Outages [can still run tests and get results]

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc

WaterLink® Spin Touch®

Code 3580-AU

includes:

- Photometer
- Instruction Manual
- Quick-Start Instructions
- 3 Syringes
- Calibration Check Disk
- USB Cord with USB Wall Adapter
- Counter Mat



Mobile WaterLink® Spin Touch®

Code 3581-AU

includes:


- All of the above (excluding the Counter Mat)
- **Waterproof Carrying Case** with Foam Inserts [holds meter, and accessories]



Note: The labs listed above do not include WaterLink® Spin Disks which are sold separately (see page 6).

WaterLink® Spin Touch®

So Simple! So Fast! So Precise!

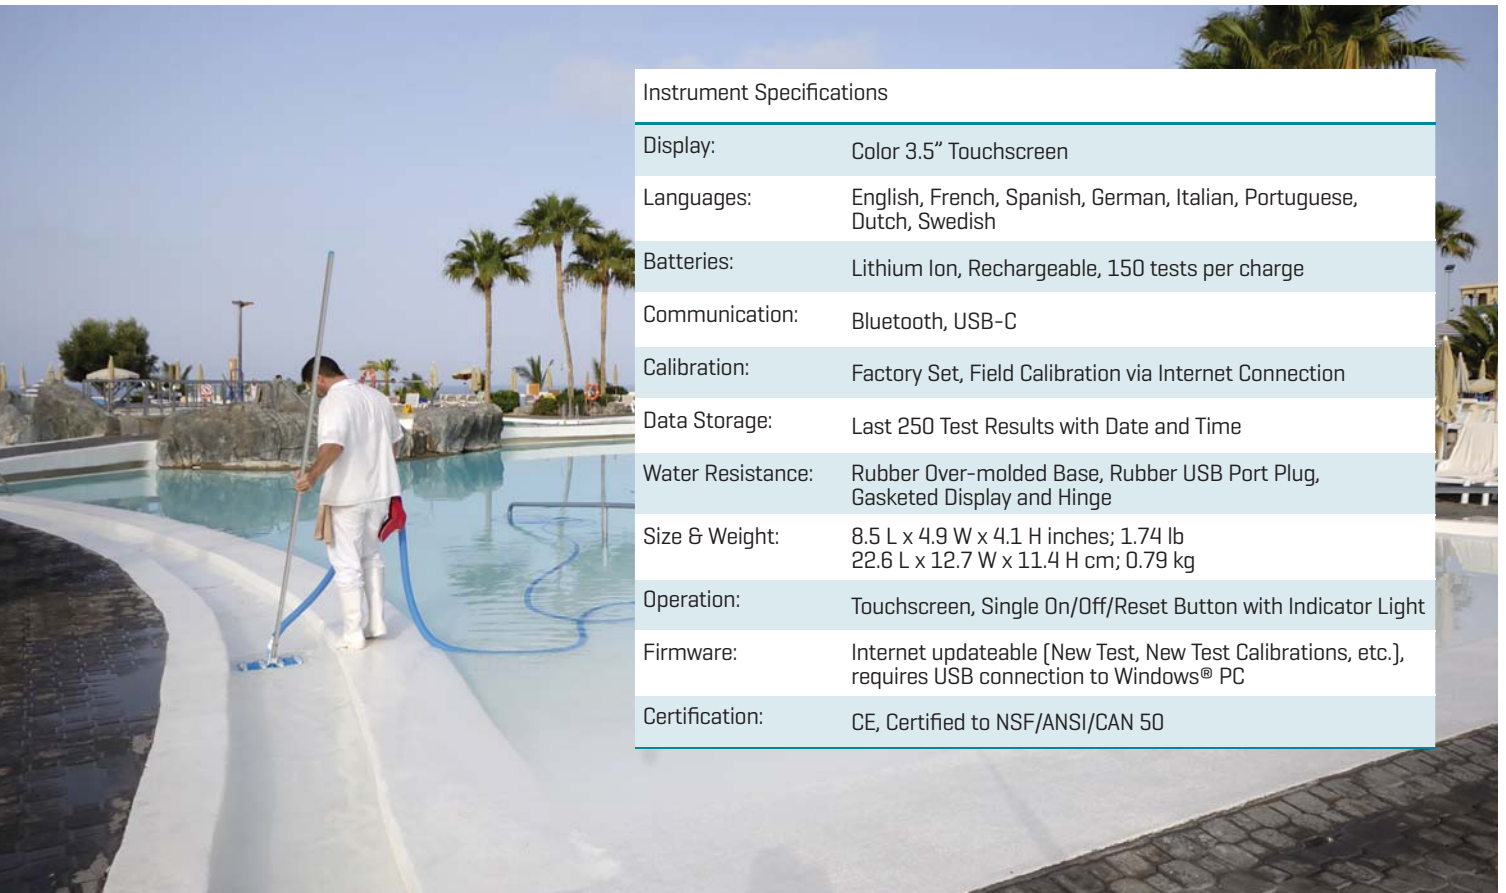

Instrument Specifications	
Display:	Color 3.5" Touchscreen
Languages:	English, French, Spanish, German, Italian, Portuguese, Dutch, Swedish
Batteries:	Lithium Ion, Rechargeable, 150 tests per charge
Communication:	Bluetooth, USB-C
Calibration:	Factory Set, Field Calibration via Internet Connection
Data Storage:	Last 250 Test Results with Date and Time
Water Resistance:	Rubber Over-molded Base, Rubber USB Port Plug, Gasketed Display and Hinge
Size & Weight:	8.5 L x 4.9 W x 4.1 H inches; 1.74 lb 22.6 L x 12.7 W x 11.4 H cm; 0.79 kg
Operation:	Touchscreen, Single On/Off/Reset Button with Indicator Light
Firmware:	Internet updateable (New Test, New Test Calibrations, etc.), requires USB connection to Windows® PC
Certification:	CE, Certified to NSF/ANSI/CAN 50

NSF CERTIFICATION

The NSF/ANSI/CAN 50 certification mark on a water quality testing device (WQTD) used in recreational waters, such as pools and spas, means that the product was reviewed and certified by NSF International to meet applicable American National Standards for product design and performance. NSF tests and re-tests products to confirm that they comply with all requirements of certification for performance, accuracy and operating range. Certification levels of L1, L2, and L3.

Go to www.nsf.org for a current listing of LaMotte NSF certified products.






WaterLink® SpinDisk™ Series For Pool and Spa Testing

10 Test Parameters Disks


Ideal for Service, In-Store,
and Public Pool Testing

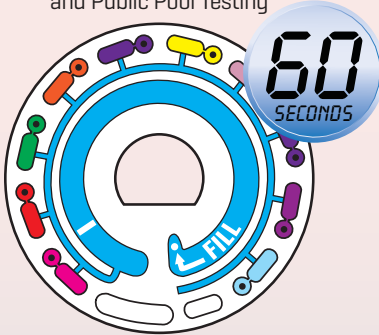

See Test Parameters in Chart at right

Test 3 Parameters, 3 Times!

Ideal for Public Pools testing
throughout the day

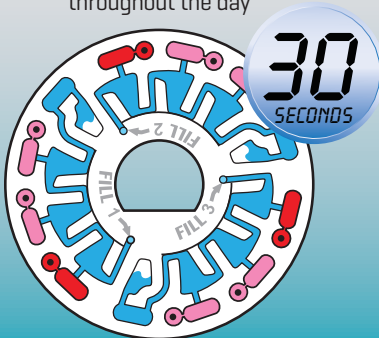

See Test Parameters in Chart at right

The genius behind the Spin Touch® is its Patented*
Centrifugal Fluidics Reagent Disk—designed to analyse
10 or 3 parameters simultaneously!

Order Code	4348	4349	4350	4331	4355	4334	4335
Series #	104	204	304	402	801	501	601
Uses per Disk	Single	Single	Single	Single	Single	3	3

Test Parameter	Range	4348	4349	4350	4331	4355	4334	4335
Free Chlorine [DPD]	0-15 ppm	■	■	■		■	■	■
Total Chlorine [DPD]	0-15 ppm	■	■	■		■	■	
Bromine [DPD]	0-33 ppm	■	■	■		■	■	■
pH	6.4-8.6	■	■	■	■	■	■	■
Total Hardness	0-1200 ppm	■	■	■		■		
Calcium Hardness	0-800 ppm				■			
Total Alkalinity	0-250 ppm	■	■	■	■	■		■
Cyanuric Acid	5-150 ppm	■	■	■		■		
Copper	0-3.0 ppm	■	■	■	■			
Iron	0-3.0 ppm	■			■			
Salt	0-5000 ppm	■	■	■		■		
Phosphate	0-2000 ppb		■			■		
Borate	0-80 ppm			■	■			
Magnesium	0-2000 ppm					■		
Biguanide	0-70 ppm				■			
Biguanide Shock	0-250 ppm				■			

* Disk Patent No. 8,734,734 | FCI Patent No. 8,987,000 | TCI Patent No. 8,993,337 | FCI EU Patent No. EP2784503 A1




RECYCLE YOUR DISKS! Ship us your used disks—we'll grind and recycle them. For details, go to waterlink-spintouch.com/support



100-Pack WaterLink® Spin Disks


Now offering 100-pack WaterLink® Spin Disks [Code 4331-J, 4348-J, 4349-J, 4350-J, and 4355-J].

So Simple!



Fill the disk

So Fast!

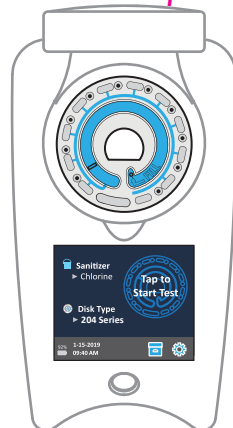

Insert the disk

So Precise!



Results in 30 or 60 Seconds

WaterLink® SpinDisk™ Series For Water Conditioning & Filtration



SpinDisk™ Reagent Cartridges

For Water Conditioning & Filtration

The versatile WaterLink® Spin Touch® offers the ability to measure drinking water by using the Treated Water Series DW13 disk [Code 4336-H] and Well Water Series DW21 [Code 4337-H]. Our disks are manufactured right in our plant, assuring the highest quality control standards.

Treated Water Series DW13

Code 4336-H [50-pack]

factors | ranges

- Free Chlorine | 0-15 ppm
- Total Chlorine | 0-15 ppm
- Combined Chlorine | 0-15 ppm
- pH | 6.4-10.0 pH
- Total Hardness | 0-70 gpg, 0-1200 ppm
- Total Iron | 0-6 ppm
- Copper | 0-6 ppm
- Total Alkalinity | 0-250 ppm

Well Water Series DW21

Code 4337-H [50-pack]

factors | ranges

- pH | 4.5-8.6 pH
- Total Hardness | 0-70 gpg, 0-1,200 ppm
- Total Iron | 0-6 ppm
- Ferric Iron | 0-6 ppm
- Ferrous Iron | 0-6 ppm
- Copper | 0-6 ppm
- Nitrate [NO₃] | 0-45 ppm
- Nitrite [NO₂] | 0-2 ppm
- Total Alkalinity | 0-250 ppm



Disk Patent No. 8,734,734 | FCI Patent No. 8,987,000 | TCI Patent No. 8,993,337 | FCI EU Patent No. EP2784503 A1